


Atlas Box Surface Mounted

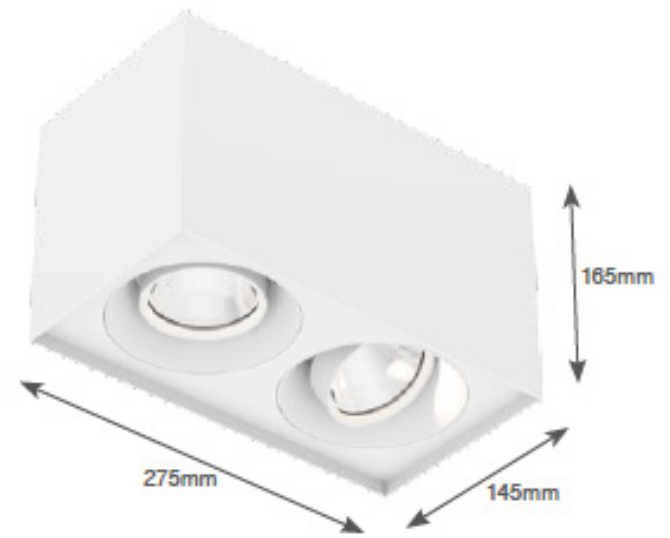

Electrical Parameters

Base Model No.:	LL.1031.22.01
LED Module:	2x Bridgelux Vero 18
Colours:	Several options
Wattage:	31W
Beam Angle:	22°, 45°, 58°
CCT:	2700K - 4000K, Class A
IP Rating:	Class I, IP 20
CRI:	Ra+80, Ra+90

Features

- High quality components.
- 2700K, 3000K, 4000K and Class A LED available.
- 3 Different beam angles possible.
- Lots of color possibilities.
- Passive cooled, high power downlight.
- Compact design.
- Dimming options: Touch & Dali

Colours



Specifications

Model	Wattage	CCT/CRI	Lumens	Colour	Beam Angle
LL.1031.22.927.01	(2x) 31W	2700K - Ra90	(2x) 2570 lm	White Matt	22°
LL.1031.22.830.01	(2x) 31W	3000K - Ra80	(2x) 3306 lm	White Matt	22°
LL.1031.22.930.01	(2x) 31W	3000K - Ra90	(2x) 2666 lm	White Matt	22°
LL.1031.22.840.01	(2x) 31W	4000K - Ra80	(2x) 3511 lm	White Matt	22°
LL.1031.22.A30.01	(2x) 31W	3000K - Class A	(2x) 2543 lm	White Matt	22°